

# A-POS VENUS 208 THERMAL TRANSFER FLAT PRODUCT PRINTER



The Venus-208 Printer is a simple & economical Thermal Transfer Single Color Printer. It is designed to overprint PRICE, SELL-BY/EXP/LOT CODES, 1D & 2D BARCODES and/or LOGOS onto Garment Tags, Blister/Header Cards, Sleeves, Cut Labels, etc.

- ✚ Incorporates a 100mm (standard) or 128mm wide Print Head (optional)
- ✚ Fully Electric design requires no air connection for greater versatility
- ✚ Aircraft Grade Aluminum and Stainless-Steel construction
- ✚ Integrated Keypad provides fast and simple operational controls
- ✚ Open Platform design allows quick and easy Thermal Ribbon changes
- ✚ Print speeds up to 150 mm's/sec. in 300 dpi Resolution
- ✚ Digital Thermal Transfer Technology requires no Metal Type, Inks or Dies and has a very low cost of operation and maintenance
- ✚ Operates with Nice Label®, Bartender® and Label View® Labeling Software
- ✚ Ideal for the Textile, Food, Medical Device, Cosmetic, Automotive, Sporting Goods & Hardware Industries



## VENUS SPECIFICATIONS


|                        |   |              |
|------------------------|---|--------------|
| Print Head Type        | Near Edge   |              |
| Print Head Width       | 100mm's   | 128mm's      |
| Resolution             | 300 dpi   |              |
| Print Speed            | Up to 6"/sec (150mm's/sec.)                                     |              |
| Max. Print Length      | 16" (400mm's)   |              |
| Product Width          | 40 – 101mm's  | 40 – 137mm's |
| Product Length         | 50 – 300mm's  | 50 – 400mm's |
| Product Thickness      | .007' - .032" (.02 - .08mm's)                                   |              |
| Max. Stack Height      | Up to 6" (150mm's) depending upon Product                       |              |
| Max Ribbon Length      | 1665" (500M)  |              |
| Ribbon width           | 25 – 100mm's  | 25 – 128mm's |
| Ribbon Core Diameter   | 1" (25mm's)   |              |
| Ribbon Saver           | Standard  |              |
| Interface              | Parallel, Serial or USB (LAN Optional)                          |              |
| Resident Fonts         | 17 Standard 2 Scalable  |              |
| Print Rotation         | 0°, 90°, 180° or 270° for Character Fonts, Bar Codes & Graphics |              |
| Power Requirements     | 100/220 VAC (+/- 10%) 50/60 Hz. @ 200W                          |              |
| Operating Temperature  | 38°F - 100°F (4°C - 40°C)                                       |              |
| Machine Dimensions     | 19"W x 13.5"D x 16"H (378. x 335mm x 400mm)                     |              |
| Approx. Machine Weight | 45 lbs. (21kg.)   |              |




Thermal Ribbons



Opt. Power Restacker

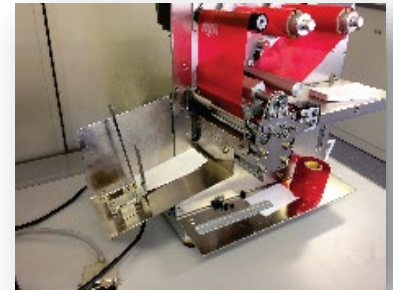

Std. Static Tray



**DALEMARK**  
INDUSTRIES, Inc.

575 Prospect St., #211  
Lakewood, New Jersey 08701-5073  
Tel: (732) 367-3100

fax: (732) 367-7031  
e-mail: [sales@dalemark.com](mailto:sales@dalemark.com)  
website: [www.dalemark.com](http://www.dalemark.com)

Covered under one or more of the following PAT. Nos.:

|         |         |         |
|---------|---------|---------|
| 3977317 | 3702000 | 734135  |
| 3081697 | 3808970 | 4068578 |
| 3964383 | 946271  | 4037529 |
| 1512180 | 3140376 | 261056  |



Printed in U.S.A.  
© 2024 DALEMARK  
Industries, Inc.

In U.S.A., Canada, U.K.