




SPECIFICATIONS



| | |
|----------------------------|---------------------------------|
| Accuracy: | ± 1 mm |
| Label Width: | 10~100 mm |
| Label Length: | 10~250 mm |
| Label Roll: | ID: 3"(75 mm), OD:12"(300 mm) |
| Power: | Single phase 110/220V, 50/60 Hz |
| Dimension: | 57"L x 31"W x 55"H |
| Labelling Speed: | 40~150 pcs/min |
| Stepper Motor Drive | |



Optional Pick & Place Infeed

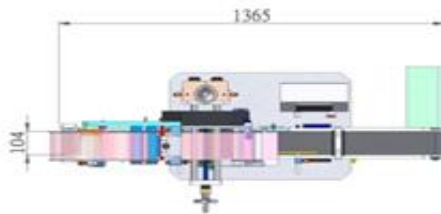

DIAGRAM

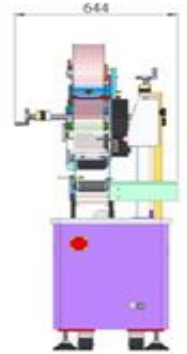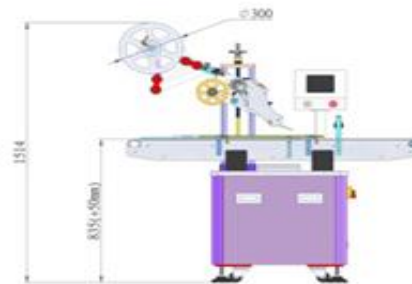

Features

- Stepper Motor for fast and accurate labeling performance
- Height and angle are adjustable
- Microprocessor Controller W/LED Screen
- Label Count Down Production Run Counter
- Variable labeling/conveyor speed
- One Touch Label set and positioning
- Modular design for easy maintenance / Quick and Easy Changeover
- In Line Application or Independent Operation
- Product Sensor
- Sanitary Stainless Steel and Anodized Aluminum Frame
- Heavy Duty Construction

Options

- Servo Motor: Labeling Speed up to 40 Meters/Min
- Touch Screen Control System with Job Memory
- Stainless Cabinet
- Hot Stamp Coder
- Passive Top Pressing Belt: For Slim Products
- LION Clear Label Sensor