
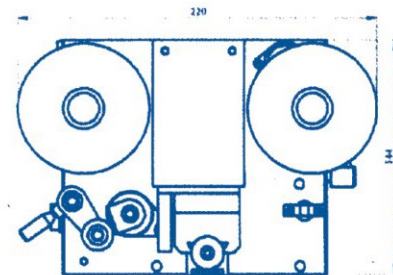


# DALEMARK®

# POP-2 HOT STAMP CODER

SERIES  
**8000**  
DATA SHEET

## Hot Stamp Coder Designed for Integration with Most Packaging Systems

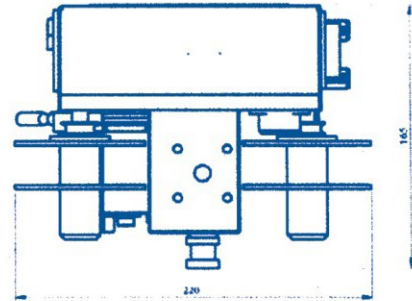

### Features & General Specifications

- Compact / No Scheduled Maintenance
- Signal Req'd.: NPN, 12 VDC or Contact Signal
- Micro Processor Controller
- Air Drive (All Electric Optional)
- Easy Foil Load
- Includes End of Ribbon Sensor
- Prints in 2 or 3 mm. Char. Heights
- 1/2" x 1.3" Max. Print Area
- Elect. Req.: 110/220V @ 50/20 Hz.
- Air Required: 80 P.S.I. @ .5 C.F.M.
- Max. Ribbon Width: 1 3/8"
- Prints up to 3 Lines of Copy x 14 Characters
- Machine Weight: Approximately 9 lbs.
- Dimensions: 5 1/2" (L) x 9" (W) x 6" (H)
- Print Speed: Up to 80 CPM
- Max. Ribbon Length: 600'

# DALEMARK®

DALEMARK  
INDUSTRIES, Inc.

575 Prospect St., #211  
Lakewood, New Jersey 08701-5073  
Tel: (732) 367-3100

fax: (732) 367-7031  
e-mail: [sales@dalemark.com](mailto:sales@dalemark.com)  
website: [www.dalemark.com](http://www.dalemark.com)

Covered under one or more of the following PAT. Nos.:

|         |         |         |
|---------|---------|---------|
| 3977317 | 3702000 | 734135  |
| 3081697 | 3808970 | 4068578 |
| 3964383 | 946271  | 4037529 |
| 1512180 | 3140376 | 261056  |

 For Export Excellence

Printed in U.S.A.  
© 2022 DALEMARK  
Industries, Inc.

In U.S.A., Canada, U.K.