


Features & General Specifications

- Scrap rewind for quick start and removal of waste liner Full scrap rewind feature.
- Durable all steel frame with powder coat finish
Footswitch activated
- Accuracy: +/- 1/32
- Minimum Label Size: 1/2" x 1/2"
- Maximum Roll Diameter: 10"
- Standard Maximum Stroke: 4"
- Core Size Diameter: 1" or 3"
- Electrical Requirements: 115 VAC. 50/60 Cy.
- Air Requirements: 60 PSI
- Machine Dimensions: 17"W x 24"H x 15"L
- Shipping Weight: 55 lbs.(25kg.)

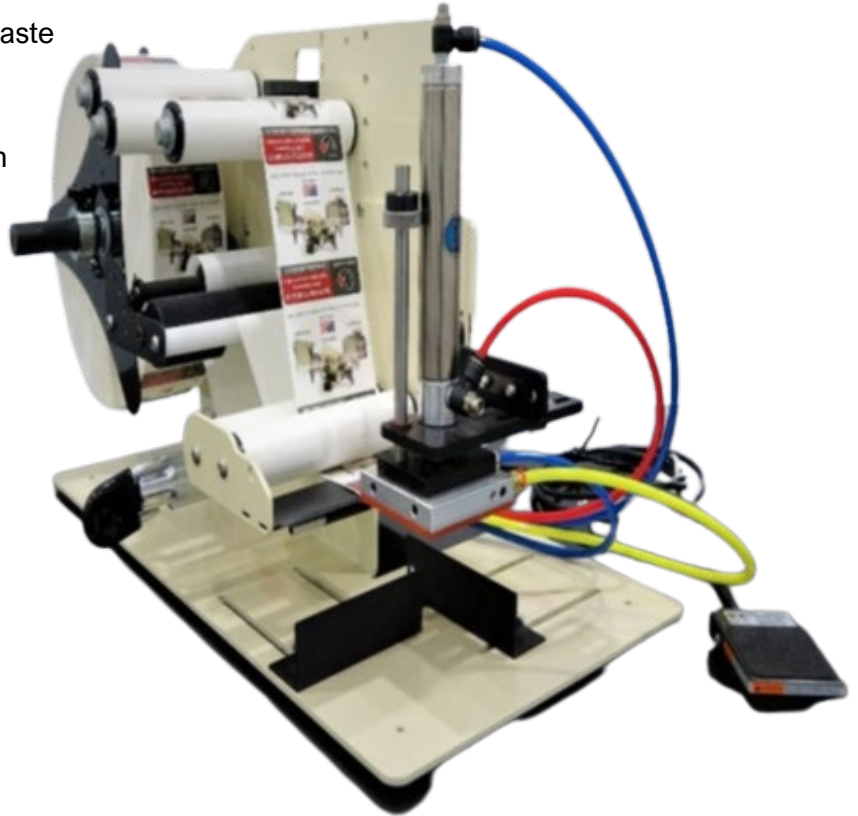

The Series "TTLA" Tabletop Tamp Label Applicator is a reliable industrial grade labeling system that is simple to operate

Options

- Hot Stamp Imprinter
- Product Fixture
- Universal Fixture Retainer
- 7" Wide Label Kit
- Extender Stroke Tamp Cylinder
- Clear Label Photo Sensor



**DALEMARK
INDUSTRIES, Inc.**

575 Prospect St., #211
Lakewood, New Jersey 08701-5073
Tel: (732) 367-3100

fax: (732) 367-7031
e-mail: sales@dalemark.com
website: www.dalemark.com



Covered under one or more of the following PAT. Nos.:

3977317	3702000	734135
3081697	3808970	4068578
3964383	946271	4037529
1512180	3140376	261056

Printed in U.S.A.
© 2022 DALEMARK
Industries, Inc.

In U.S.A., Canada, U.K.