

VENUS THERMAL TRANSFER FLAT PRODUCT PRINTER



The Venus Printer is a simple & economical Thermal Transfer Single Color Printer. It is designed to overprint PRICE, SELL-BY/EXP/LOT CODES, 1D & 2D BARCODES and/or LOGOS onto Garment Tags, Blister/Header Cards, Sleeves, Cut Labels, etc.

- ✚ Incorporates a 100mm (standard) or 128mm wide Print Head (optional)
- ✚ Fully Electric design requires no air connection for greater versatility
- ✚ Aircraft Grade Aluminum and Stainless-Steel construction
- ✚ Integrated Keypad provides fast and simple operational controls
- ✚ Open Platform design allows quick and easy Thermal Ribbon changes
- ✚ Print speeds up to 150 mm's/sec. in 300 dpi Resolution
- ✚ Digital Thermal Transfer Technology requires no Metal Type, Inks or Dies and has a very low cost of operation and maintenance
- ✚ Operates with Nice Label®, Bartender® and Label View® Labeling Software
- ✚ Ideal for the Textile, Food, Medical Device, Cosmetic, Automotive, Sporting Goods & Hardware Industries

Ribbon = 94
HV50 @ 6"/Sec


DALEMARK®

575 Prospect St
Lakewood, NJ 08701
1-732-367-3100



VENUS SPECIFICATIONS


Print Head Type	Near Edge	
Print Head Width	100mm's	128mm's
Resolution	300 dpi	
Print Speed	Up to 6"/sec (150mm's/sec.)	
Max. Print Length	16" (400mm's)	
Product Width	40 – 101mm's	40 – 137mm's
Product Length	50 – 300mm's	50 – 400mm's
Product Thickness	.007' - .032" (.02 - .08mm's)	
Max. Stack Height	Up to 6" (150mm's) depending upon Product	
Max Ribbon Length	1665" (500M)	
Ribbon width	25 – 100mm's	25 – 128mm's
Ribbon Core Diameter	1" (25mm's)	
Ribbon Saver	Standard	
Interface	Parallel, Serial or USB (LAN Optional)	
Resident Fonts	17 Standard 2 Scalable	
Print Rotation	0°, 90°, 180° or 270° for Character Fonts, Bar Codes & Graphics	
Power Requirements	100/220 VAC (+/- 10%) 50/60 Hz. @ 200W	
Operating Temperature	38°F - 100°F (4°C - 40°C)	
Machine Dimensions	19"W x 13.5"D x 16"H (378. x 335mm x 400mm)	
Approx. Machine Weight	45 lbs. (21kg.)	

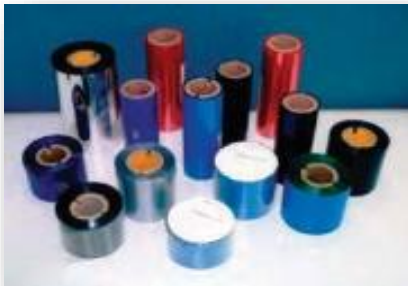


Thermal Ribbons



Opt. Power Restacker

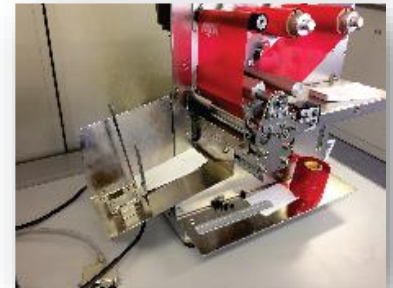

Std. Static Tray

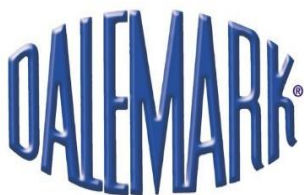

DALEMARK
INDUSTRIES, Inc.

575 Prospect St., #211
Lakewood, New Jersey 08701-5073
Tel: (732) 367-3100

fax: (732) 367-7031
e-mail: sales@dalemark.com
website:www.dalemark.com



Covered under one or more of the following PAT. Nos.:

3977317	3702000	734135
3081697	3808970	4068578
3964383	946271	4037529
1512180	3140376	261056

Printed in U.S.A.
© 2024 DALEMARK
Industries, Inc.

In U.S.A., Canada, U.K.