


DALEMARK® CONTAINER TRANSPORT SYSTEM

SERIES
825-TA/HD
DATA SHEET

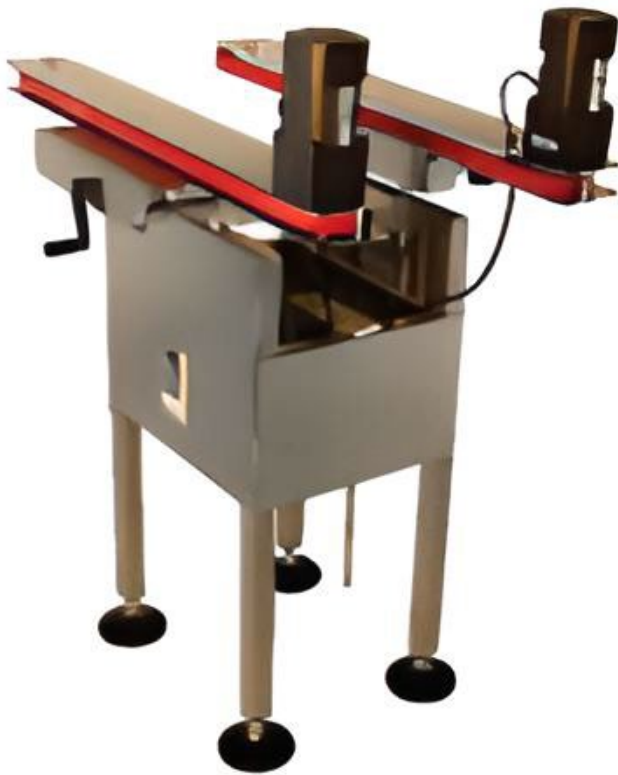

The Dalemark Series 825-TA/HD is designed to be used for either standalone or in-line applications to provide a simple “container transporter” for applying ink jet copy to the top, sides, or bottoms of various filled or unfilled containers. These units provide easy accessibility to the print head for cleaning or maintenance. Round, rectangular, and square containers are readily accommodated. Systems include Leveling Pads and Stainless Steel/Aluminum Construction.

Features & General Specifications

- Minimum Product Diameter – 1/4”
- Maximum Product Diameter 8”
- Dual Brother Gear Motors
- Maximum Speed – 80 fpm
- Variable Speed Drive
- Hand Crank Width Adjustments
- Belt Overhang – 6” /side
- Independent 1’ Wide Non-Scuffing Transport Belts
- Dimension: 38” L x 24” W
- Belt Height 35½” to 42”
- Minimum Product Height 3/4”
- Works with C.I.J. & H.R. Printers
- Net Weight: 240 lbs.
- Electrical Req.: 110VAC
- American Made
- Tilting Capability up to 45 degrees side to side.



DALEMARK
INDUSTRIES, Inc.

575 Prospect St., #211
Lakewood, New Jersey 08701-5073
Tel: (732) 367-3100

fax: (732) 367-7031
e-mail: sales@dalemark.com
website: www.dalemark.com

Covered under one or more of the following PAT. Nos.:

3977317	3702000	734135
3081697	3808970	4068578
3964383	946271	4037529
1512180	3140376	261056



Printed in U.S.A.
© 2022 DALEMARK
Industries, Inc.

In U.S.A., Canada, U.K.